

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau




INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 5 : H04Q 7/04		(11) International Publication Number: WO 94/10813
A1		(43) International Publication Date: 11 May 1994 (11.05.94)
(21) International Application Number: PCT/SE93/00878		(81) Designated States: AU, BR, CA, FI, JP, KR, NZ, RU, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(22) International Filing Date: 26 October 1993 (26.10.93)		
(30) Priority data: 9203143-4 27 October 1992 (27.10.92) SE		
(71) Applicant: TELEFONAKTIEBOLAGET L M ERICSSON [SE/SE]; S-126 25 Stockholm (SE).		
(72) Inventor: LANTTO, Sven, Jörgen ; Middagsvägen 14, S-146 32 Tullinge (SE).		
(74) Agents: DELHAGE, Einar et al.; Bergenstråhle & Lindvall AB, P.O. Box 17704, S-118 93 Stockholm (SE).		Published With international search report.

(54) Title: RECEIVING SUBSCRIBER DATA FROM HLR IN GSM MSC/VLR

(57) Abstract

The invention relates to a method of receiving in a GSM-network data for supplementary services in MSC/VLR which have been signalled via the protocol MAP between HLR and MSC/VLR. MAP contains sequences of "containers" for supplementary services, where respective "containers" always include a parameter that indicates the service to which the contents of a respective container relate, together with the data that varies from service to service. This parameter is always located in the same position internally within the "container". The method includes a function whose purpose is to analyze syntactically subscriber data received in MAP, to the extent that respective supplementary services can be identified. When the correct supplementary service has been identified with the aid of the data type SS-code, it obtains access to the contents of the container. Respective supplementary services analyze syntactically those data types that are included in the container in accordance with a structure which is known only in a respective supplementary service. Data is then stored locally for each supplementary service in MSC/VLR.

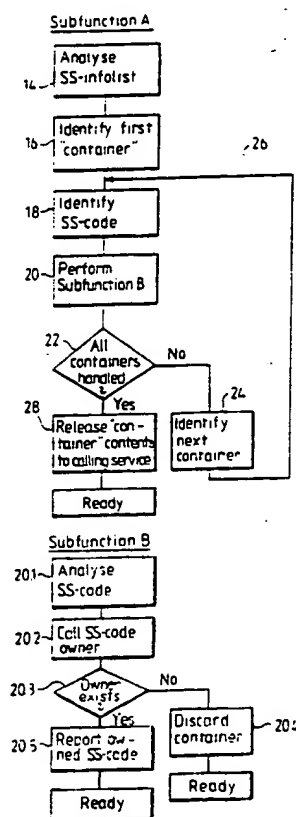

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AT	Austria	GB	United Kingdom	MR	Mauritania
AU	Australia	GE	Georgia	MW	Malawi
BB	Barbados	GN	Guinea	NE	Niger
BE	Belgium	GR	Greece	NL	Netherlands
BF	Burkina Faso	HU	Hungary	NO	Norway
BG	Bulgaria	IE	Ireland	NZ	New Zealand
BJ	Benin	IT	Italy	PL	Poland
BR	Brazil	JP	Japan	PT	Portugal
BY	Belarus	KE	Kenya	RO	Romania
CA	Canada	KG	Kyrgyzstan	RU	Russian Federation
CF	Central African Republic	KP	Democratic People's Republic of Korea	SD	Sudan
CG	Congo	KR	Republic of Korea	SE	Sweden
CH	Switzerland	KZ	Kazakhstan	SI	Slovenia
CI	Côte d'Ivoire	LI	Liechtenstein	SK	Slovakia
CM	Cameroon	LK	Sri Lanka	SN	Senegal
CN	China	LU	Luxembourg	TD	Chad
CS	Czechoslovakia	LV	Latvia	TG	Togo
CZ	Czech Republic	MC	Monaco	TJ	Tajikistan
DE	Germany	MD	Republic of Moldova	TT	Trinidad and Tobago
DK	Denmark	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	US	United States of America
FI	Finland	MN	Mongolia	UZ	Uzbekistan
FR	France			VN	Viet Nam
GA	Gabon				

Receiving Subscriber Data from HLR in GSM MSC/VLRField of the invention

The present invention generally relates to cellular
5 mobile radio systems based upon the so called GSM standard
(GSM - Global System for Mobile communication), and more
particularly to a method for receiving in a GSM network data
for supplementary services.

10 Background of the invention

A GSM network basically comprises at least one base
station system BSS including a base station controller BSC
and base station transceivers BTS. The GSM network furthermore
includes a mobile services switching centre MSC, a home
15 location register HLR and a visitors location register VLR.

Each subscribing mobile station MS belongs to a HLR in a
home network, wherein permanent subscriber data is stored.
When a mobile station is registered in a MSC/VLR as a new
visitor, that mobile station's HLR sends a copy of the
20 relevant subscriber data to MSC/VLR. The data is sent via the
CCITT #7 network from HLR to MSC/VLR. The procedures for this
are described in the protocol MAP (Mobile Application Part -
specified in ETSI GSM recommendation GSM 09.02). The data
structure in MAP is described generally in accordance with
25 ASN.1 (Abstract Syntax Notation). ASN.1 and its rules are
specified in CCITT X.208/X.209.

Subscriber data in MAP is found defined in a general data
type referred to as SubscriberData. This data type is of the
"constructed" type, which according to ASN.1 means that it,
30 in turn, contains new data types. The data type in
SubscriberData which relates to data for supplementary
services is called ProvisionedSupplementaryServices.
ProvisionedSupplementaryServices is, in turn, an SS-infolist
which, according to the data structure in MAP, means that it
35 is comprised of four different data types:

- ForwardingInfo
- CallBarringInfo
- CUG-information
- SS-data

ForwardingInfo is a data type which describes call forwarding services in a general manner. CallBarringInfo is a data type which describes call barring services in a general way. CUG-information describes the more complicated data structure of a closed user group, while SS-data describes the data structure of other supplementary services that do not fall beneath any of the categories listed above.

In turn, these data types contain the data that is specific to respective supplementary services. For example, in the case of call forwarding services, there is a great deal of data which is common to these services, and consequently call forwarding data is generally described in ForwardingInfo. Thus, supplementary service data is to some extent general data, and to another extent data which is specific to a respective supplementary service.

The data types ForwardingInfo, CallBarringInfo and SS-data have one feature in common, which is that the first data type internally is the SS-code.

An SS-code is a data type which identifies a certain SS (Supplementary Service). Thus, all supplementary services in GSM are identified with the aid of an SS-code. An exception to this rule is the supplementary service CUG.

The aforesaid can be summarized more simply by saying that MAP contains sequences of what is here referred to as "containers" for supplementary service data. Respective "containers" always include a parameter which indicates the service to which the "container" content relates (this parameter is the "SS-code" in MAP), together with the data that varies from service to service. The parameter which identifies the intended service is always found in the same location internally within the "container", therewith enabling the data receiver to be identified in the same way, irrespective of the service entailed.

35 Background Art

EP 454,647 describes the routing of calls made to mobile subscribers. The home exchange of the mobile subscriber maintains information which identifies the location of the mobile subscriber. When a call to a mobile is received in an

interrogation exchange, the exchange requests from the home exchange information as to where the incoming call shall be routed. The home exchange, however, first asks the exchange where the mobile is assumed to be located to page the mobile.

- 5 The result is reported to the home exchange, whereafter the home exchange informs the interrogation exchange of the location of the mobile.

U.S. 4,644,351 relates to the transmission of messages via a radio channel, from one of a plurality of fixed central
10 locations with different coverage to remote units. Each remote unit is allocated a unique address and is connected to one of the central locations. When a message to a selected remote unit is accepted in a central location, it is stored in a paging site connected to the selected remote unit. The
15 selected remote unit is localized by searching through a file which contains remote unit addresses together with the locations of those remote units which are not located in the area covered by their connected central locations. If the remote unit is not located in the radio covering area of the central
20 location to which it is connected, the message and address are sent to the central location given in the address file.

U.S. 4,700,374 relates to mobile telephone localization. A plurality of mobile telephone exchanges supervise or monitor the presence of mobile telephone units in their own
25 areas and are connected to a national centre. The national centre is able to receive queries concerning the location of mobile telephone units from each of the mobile telephone exchanges and transmit this information to all mobile telephone exchanges in the system, via a satellite. The
30 information contained in the localizing information relates to the identity of the mobile telephone exchange and of the mobile telephone and is sent by the national centre to the mobile telephone exchange as an established query so as to enable the exchange to set-up a connection.

35 U.S. 4,752,951 describes a personal location system. A "PERSONAL LOCATION UNIT" includes "personal location units" and a base station. Information relating to subscriber locations is sent to a data base.

U.S. 4,901,340 relates to a technique which allows a

roaming mobile telephone subscriber to receive a call directed to his home area while said subscriber is located in a foreign area outside his home area. The MTSO of the foreign area receives information to the effect that the subscriber in the foreign area wishes to receive calls directed to his home area. The subscriber is allocated a temporary directory number (TDN) for use in the foreign area.

U.S. 5,090,050 describes communication with radio telephones that belong to a radio telephone system when said telephones operate in another geographical area served by another radio telephone system. The radio telephone user sends via the telephone a signal which activates a database in the home system. The activation signal identifies the radio telephone and the other radio telephone system which serves the area in which the radio telephone is temporarily located. When receiving a call which is directed to the radio telephone, the database searches for the activation signal and the call is transferred to the other system via a land telephone line. Radio communication is then established between the other system and the radio telephone.

Summary of the Invention

The object of the present invention is to provide a general solution to the problem of receiving data for supplementary services in MSC/VLR that have been signalled via MAP between HLR and MSC/VLR. The solution shall enable new supplementary services to be incorporated in MSC/VLR, without influencing those functions that deal with the termination of the MAP-protocol in MSC/VLR.

According to the present invention, this object is achieved in a method of receiving in a GSM standard network data concerning supplementary services in MSC/VLR which have been signalled via a GSM recommended protocol MAP between HLR and MSC/VLR, where MAP contains sequences of "containers" for supplementary service data, where respective "containers" include a parameter identifying the service to which the content of the container relates, together with data varying between services, by

a) analyzing syntactically subscriber data received in

MAP for identifying respective supplementary services,

b) allowing access for an identified supplementary service to the content of the container,

c) making the respective supplementary service analyze
5 syntactically those data types which are included in the container in accordance with a structure which is known only in the respective supplementary service,

d) storing data locally for each supplementary service in MSC/VLR.

10 A preferred embodiment of the invention comprises the following functional steps:

A) 1. analyzing syntactically the content of the data type SS-infolist, i.e. the list which identifies data types in MAP, in order to identify those containers that are
15 included in the SS-infolist;

2. identifying the data type SS-code internally within respective containers;

B) 1. analyzing the value of the SS-code while securing that new SS-code values can be added without influencing the
20 function that performs the analysis, a supplementary service being pointed-out each time the analysis is performed;

2. requesting from this supplementary service release of the content of the container for use by said supplementary service, and analyzing internally within said
25 supplementary service said content.

3. repeating steps B1-2 until all containers have been gone through and all containers have been delivered to respective receiving supplementary services, while discarding containers which do not correspond to a supplementary
30 service.

As before mentioned, the data structure in MAP is described generally in accordance with ASN.1 (Abstract Syntax Notation). According to the invention, data types described according to ASN.1 syntax can be implemented in MSC/VLR in a
35 manner to enable new supplementary services to be added in MSC/VLR, which provide their own data types, without influencing those functions that deal with termination of the MAP-protocol in MSC/VLR.

Brief description of the drawings

The invention will now be described more closely below with reference to the enclosed drawings, on which

Figure 1 is a schematic diagram illustrating the basic
5 structure of a conventional GSM network,

Figure 2 schematically indicates a subscriber data information list relating to supplementary services,

Figure 3 contains flowchart representations of one embodiment of the method according to the invention.

10

Description of Preferred Embodiments

With reference to Figure 1, a GSM cellular network basically comprises a number of base station systems, of which two are generally indicated at BSS1 and BSS2,
15 respectively. Each of the base station systems BSS1 and BSS2 includes a base station controller BSC1 and BSC2, respectively, connected to base station trancellvers BTS via communication links L, one of said base station trancellvers being designated BTS.n in Figure 1. Each trancellver BTS is
20 located in an associated cell of the cellular network, which is shown in Figure 1 as a honeycomb structure wherein each hexagone represents a cell. In Figure 1 the cell containing the trancellver BTS.n is designated C.n. The GSM network furthermore includes a mobile services switching centre MSC
25 having a visitors location register VLR. There are furthermore one or more home location registers HLR which communicate with the MSC. The MSC is connected for communication with the base station controllers BSC1 and BSC2 via a public land mobile network PLMN.

30 Although not shown, the MSC shown i Figure 1 usually has an interface to other MSCs, each MSC having furthermore interfaces for connection to a local public switched telephone network.

Each subscribing mobile station MS belongs to a HLR in a
35 home network, wherein permanent subscriber data is stored. When a mobile is registered in a MSC/VLR as a new visitor, HLR sends a copy of the relevant subscriber data to MSC/VLR. The data is sent via the CCITT #7 network from HLR to MSC/VLR. The procedures for this are described in the

protocol MAP (Mobile Application Part - specified in ETSI GSM recommendation GSM 09.02). The data structure in MAP is described generally in accordance with ASN.1 (Abstract Syntax Notation). ASN.1 and its rules are specified in CCITT
5 X.208/X.209.

Subscriber data in MAP is found defined in a general data type referred to as SubscriberData. This data type is of the "constructed" type, which according to ASN.1 means that it, in turn, contains new data types. The data type in
10 SubscriberData which relates to data for supplementary services is called ProvisionedSupplementaryServices. ProvisionedSupplementaryServices is, in turn, an SS-infolist. According to the data structure in MAP and with reference to Figure 2 this means that the SS-infolist, designated 2, is
15 comprised of four different data types 4, 6, 8, and 10, viz. CallBarringInfo, ForwardingInfo, SS-data, and CUG-information, respectively.

CallBarringInfo 4 is a data type which describes call barring services in a general way. ForwardingInfo 6 is a data
20 type which describes call forwarding services in a general manner. CUG-information 10 describes the more complicated data structure of a closed user group, while SS-data 8 describes the data structure of other supplementary services that do not fall beneath any of the categories listed above.

25 The data types 4-10 contain the data that is specific to respective supplementary services. For example, in the case of call forwarding services, there is a great deal of data which is common to these services, and consequently call forwarding data is generally described in ForwardingInfo.
30 Thus, supplementary service data is to some extent general data, and to another extent data which is specific to a respective supplementary service.

The data types ForwardingInfo, CallBarringInfo and SS-data have one feature in common, which is that the first data
35 type internally is the so called SS-code, indicated at 12', 12" and 12"" in Figure 2.

An SS-code is a data type which identifies a certain SS (Supplementary Service). Thus, all supplementary services in GSM are identified with the aid of an SS-code. An exception

to this rule is the supplementary service CUG.

The aforesaid can be summarized more simply by saying that MAP contains sequences of "containers" for supplementary service data, i. e. containers 4-10. Respective "containers" always include a parameter which indicates the service to which the "container" content relates, this parameter being the "SS-code" in MAP, together with the data that varies from service to service. The parameter which identifies the intended service is always found in the same location internally within the "container", therewith enabling the data receiver to be identified in the same way, irrespective of the service entailed.

Figure 2 is intended to illustrate the principle of using sequences of "containers", which is an essential feature of the process according to the invention.

The invention implements a general function whose purpose is to analyze syntactically subscriber data that is received in MAP, to the extent that respective supplementary services can be identified. When the correct supplementary service has been identified with the aid of the data type SS-code, it is able to obtain access to the content of the "container". It is now up to respective supplementary services to analyze syntactically those data types that are included in the "container", in accordance with the structure which is known only in respective supplementary services. Data is stored locally for each supplementary service in MSC/VLR.

The function which resolves this in MSC/VLR is divided into two functions, here referred to as subfunction A and subfunction B, the procedural steps of which appear in Figures 3 and below:

Subfunction A

- Step 14 - Analyze "SS-infolist".
- Step 16 - Identify first "container".
- Step 18 - Identify "SS-code".
- Step 20 - Perform subfunction B.
- Step 22 - Decide whether all containers have been handled.
- Step 24 - If no, identify next container and pass to step

18 according to arrow 26.

Repeat until all containers have been gone through as decided in step 22.

5 Step 28 - Release the container contents when called from a "service".

Subfunction B

Step 20.1 - Analyze "SS-code".

Step 20.2 - Call the service that owns "SS-code".

Step 20.3 - Establish whether there exists an owner

10 Step 20.4 - If no, discard the "container".

Step 20.5 - When called from a "service", store information relating to the service that owns respective "SS-code".

In subfunction A, the content of the data type SS-
15 infolist is analyzed syntactically in step 14 so as to be able to identify all "containers" in the SS-infolist in step 16. The data type SS-code is identified internally within respective "containers" in step 18. The second subfunction, referred to here as subfunction B, is called-in for each
20 "container" and performs, in step 20, to identify the correct supplementary service.

The subfunction B will analyze the value of the SS-code in step 20.1. This analysis is constructed so as to enable new values to be added to SS-code without influencing the
25 function that carries out the analysis.

A supplementary service is pointed-out each time an SS-code is analyzed in step 20.1. This supplementary service is now able to call the subfunction A and therewith obtain access to the content, i.e. the data, in "its container" in
30 step 28. The content of the "container" (the data types specific for this service) are now analyzed internally within the function for the supplementary service.

This procedure is now repeated according to steps 22, 24, 26 until all "containers" have been gone through and all
35 "containers" have been delivered to respective receiving supplementary services. Those "containers" which do not correspond to a supplementary service can be discarded, step 20.4, since these containers contain data for a service which is not implemented in MSC/VLR.

This general solution for receiving subscriber data for supplementary services in MSC/VLR enables the base function, which receives subscriber data, to be constructed in a manner which will enable new supplementary services to be added
5 incrementally to MSC/VLR without needing to modify the base function.

This provides very good properties when constructing supplementary services, which are often optional for an MSC/VLR operator and each of which can thus be added without
10 influencing the base functions in MSC/VLR, in this case with respect to receiving subscriber data from HLR.

In summary, the following procedural steps are to be carried out when working with and utilizing the service that owns SS-code:

15 - When adding a new service in MSC/VLR, report "SS-code" to subfunction B by calling subfunction B, step 20.5.

 - When receiving a call from function B, call subfunction A, step 28 with a request for access to the content of the "container".

20 The nature of the software and hardware required to achieve the aforescribed functions will be obvious to the person skilled in this art and need not therefore be described in more detail here.

Claims

1. A method of receiving in a GSM standard network data concerning supplementary services in MSC/VLR which have been
5 signalled via a GSM recommended protocol MAP between HLR and MSC/VLR, where MAP contains sequences of "containers" for supplementary service data, where respective "containers" include a parameter identifying the service to which the content of the container relates, together with data varying
10 between services, comprising the steps of
- a) analyzing syntactically subscriber data received in MAP for identifying respective supplementary services,
 - b) allowing access for an identified supplementary service to the content of the container,
 - 15 c) making the respective supplementary service analyze syntactically those data types which are included in the container in accordance with a structure which is known only in the respective supplementary service,
 - d) storing data locally for each supplementary service in
20 MSC/VLR.
2. A method according to claim 1, comprising the further step of using as said parameter SS-code which is always found in the same location internally within said "container".
3. A method according to Claim 1, comprising the steps
25 of
- A) 1. analyzing syntactically the content of the data type SS-infolist, i.e. the list which identifies data types in MAP, in order to identify those containers that are included in the SS-infolist;
 - 30 2. identifying the data type SS-code internally within respective containers;
 - B) 1. analyzing the value of the SS-code while securing that new SS-code values can be added without influencing the function that performs the analysis, a
35 supplementary service being pointed-out each time the analysis is performed;
 - 2. requesting from this supplementary service release of the content of the container for use by said supplementary service, and analyzing internally within said

supplementary service said content.

3. repeating steps B1-2 until all containers have been gone through and all containers have been delivered to respective receiving supplementary services, while discarding
5 containers which do not correspond to a supplementary service.

Fig. 1

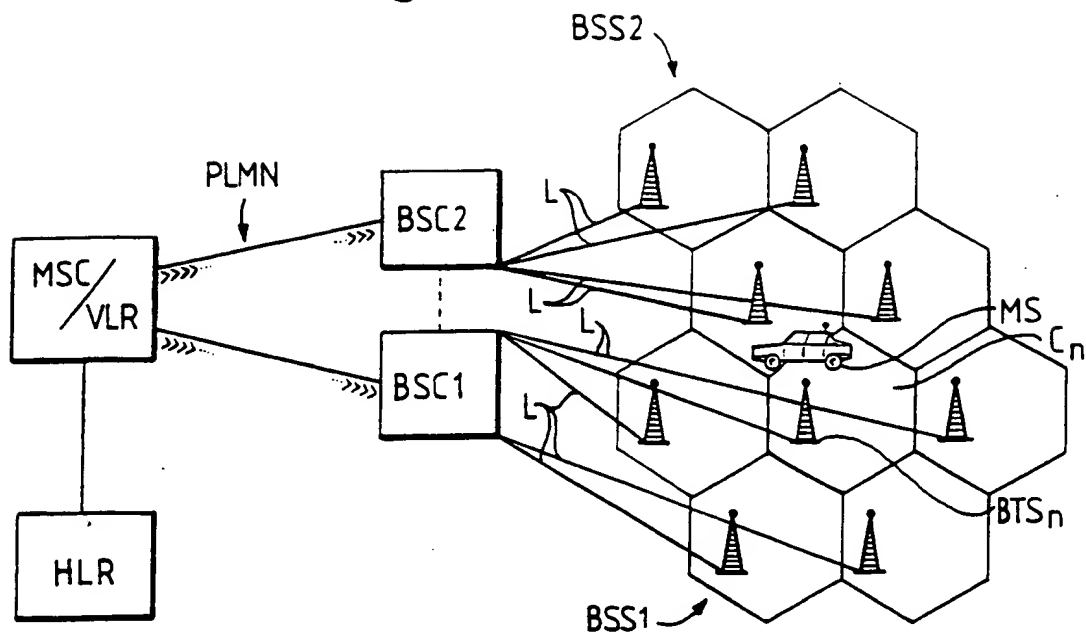


Fig. 2


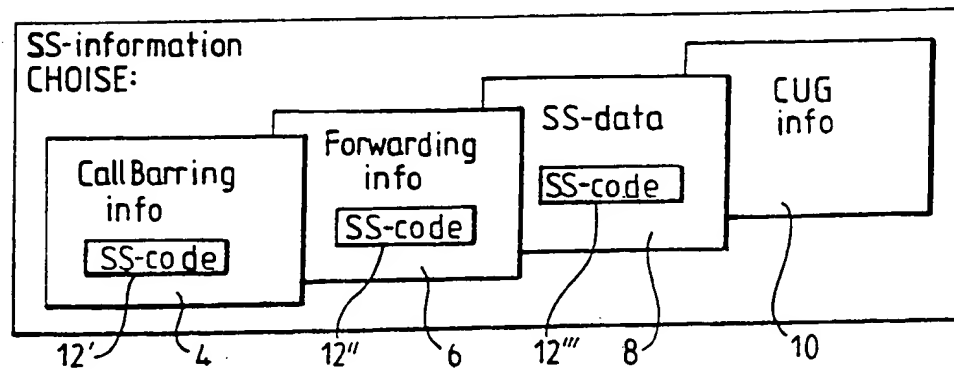


Fig. 3

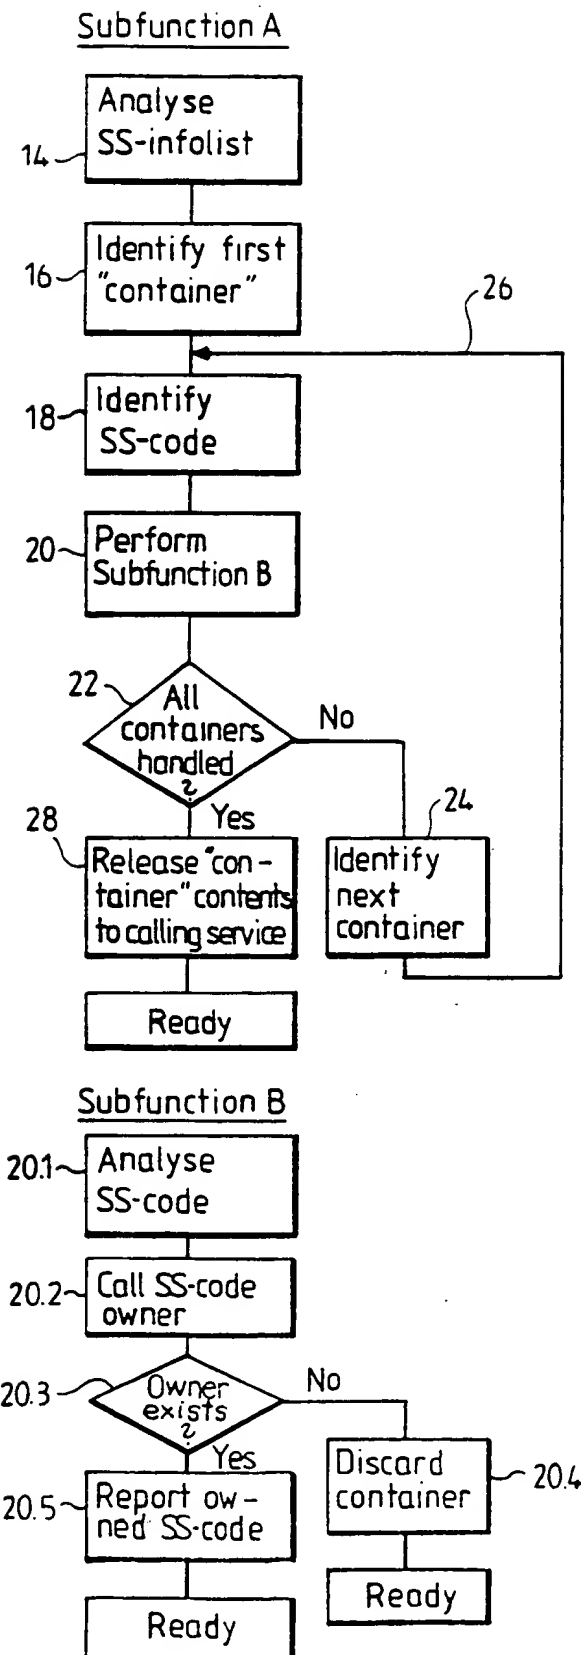

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 93/00878

A. CLASSIFICATION OF SUBJECT MATTER

IPC5: H04Q 7/04

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC5: H04B, H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	EP, A2, 0454647 (TELEFONAKTIEBOLAGET LM ERICSSON), 30 October 1991 (30.10.91) --	1-3
A	US, A, 5090050 (STUART D. HEFFERNAN), 18 February 1992 (18.02.92) -- -----	1-3

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

- *A* document defining the general state of the art which is not considered to be of particular relevance
- *E* earlier document but published on or after the international filing date
- *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- *O* document referring to an oral disclosure, use, exhibition or other means
- *P* document published prior to the international filing date but later than the priority date claimed

T later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

X document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

Y document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

& document member of the same patent family

Date of the actual completion of the international search

Date of mailing of the international search report

31 January 1994

02 -02- 1994

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Jan Silfverling
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT
Information on patent family members

30/12/93

International application No.

PCT/SE 93/00878

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP-A2- 0454647	30/10/91	AU-A- 7877791 CN-A- 1056392 WO-A- 9117620	27/11/91 20/11/91 14/11/91
US-A- 5090050	18/02/92	NONE	